


Technical Information

GSM/GPRS Module	Wavecom Q2403A
Interface	USB
Diagnostic and control	AT commands
Frequencies	GSM/GPRS 900/1800 MHz
Weight	235g
Dimensions	85×54×25mm
Operating temperature	-20°C ÷ +55°C
Input voltage	5÷12V
Input current	1÷2A
Case material	Aluminium
Sealing	IP30
Accessories (included)	<ul style="list-style-type: none">• Stylus antenna• USB cable• Sliding SIM Card Slot

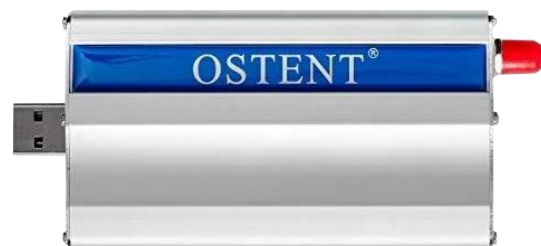

GSM/GPRS modem with USB interface.

Dual band 900/1800MHz GSM/GPRS modem with USB connection for M2M connection.

Connecting the modem to a Windows Operating System PC, **WineCapManager** can be used from remote locations to configure and control basestations with GSM module onboard ([MWDG-GSM](#), [MWDG-GSM-B](#), [MWDG-GSM-M1](#), [MWDG-4DI-GSM](#), [MWDG-4AO-GSM](#)).

Provided with USB cable, stylus antenna and equipped with a M2M sim card slot, can be configured and controlled using common AT commands.

The features shown may be subject to change without notice.