


## Technical Information

<b>Build-up</b>	Aluminium plate enclosed in PA12 plastic case
<b>Cable</b>	<ul style="list-style-type: none"> <li>• Cable length: 3m</li> <li>• Material: MFA</li> </ul>
<b>Sensible element</b>	Class "A" PT1000
<b>Temperature range</b>	-30°C ÷ +60°C
<b>Sealing</b>	IP65
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>• Sensible element: 25x25x5mm</li> <li>• Plastic case: 53x28x11mm</li> </ul>

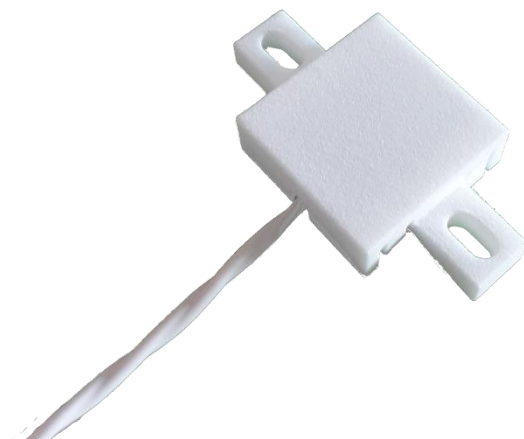

### Temperature transducer.

The **PT1000FR** is a temperature transducer to acquire surface temperatures.

The class "A" PT1000 plate (*stamp*) sensible element is made in aluminium and is enclosed in a plastic box to guarantee IP65 sealing.

The good temperature range between -30°C and +60°C let the **PT1000FR** suitable for applications where wall temperatures, surface temperatures or fluid temperatures must be acquired.

Can be interfaced with:

- All **WineCap™** product line dataloggers with PT1000 transducer input (*WSDxx-xx1K/SDxxxx1K*)
- All **WineCap™** product line probes with PT1000 transducer input (*WSSxx-xx1K*).

The features shown may be subject to change without notice.