

FIX-WSD10TII

FIX-MAG-WSD10TII

Capetti
ELETTRONICA

Wireless
Capelli


WSD10TII

Fastening systems.


Accessories for magnetically fixing or gluing the [WSD10TII](#) wireless tiltmeter.

Suitable to:

- Wall mounting
- Fixing on horizontal plane
- Inclined plane fixing

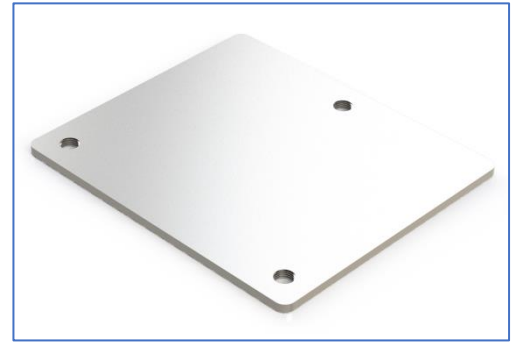

- **FIX-WSD10TII:** Kit consisting of fixing plate and screws for 'bonded' applications with mounting glue sealant.
- **FIX-MAG-WSD10TII:** Kit consisting of 4 neodymium magnets and fixing screws for applications on metal structures.

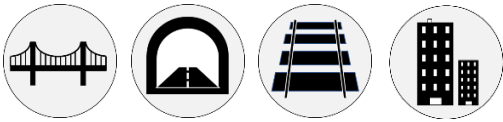

FIX-WSD10TII



FIX-MAG-WSD10TII

General technical specifications


FIX-WSD10TII

Dimensions	149.8x149.8x4.0mm
Material	galvanised iron
Drillings	3x8MA - threaded

FIX-MAG-WSD10TII

Diameter	20mm
Thickness	6mm
Threading	M4
Weight	0.011Kg
Traction force	Up to 7.0Kg
Material	Neodymium
Maximum operative temperature	80°C

Capetti
ELETTRONICA

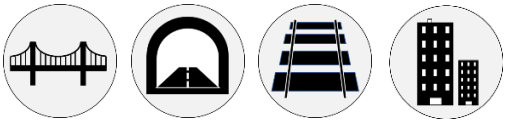

FIX-WSD10TII

FIX-MAG-WSD10TII

The [WSD10TII](#) wireless tiltmeter can be installed in any position, thanks to its integrated measuring axis zeroing functionality.

The FIX-WSD10TII 'glue-down' mounting system allows the datalogger to be fixed to any surface, without the need for dowelling or drilling.

At the end of the monitoring campaign, the [WSD10TII](#) can be removed from the glued mount, which will serve as a pre-installed holder for a possible new measurement campaign.

The magnetic fixing system consists of 4 neodymium magnets and fixing screws, which allows the [WSD10TII](#) to be placed on metal structures.

The FIX-MAG-WSD10TII kit guarantees a tensile force of up to 7 kg under extreme working conditions and can withstand temperatures of up to 80°C.

Completely removable at the end of the monitoring campaign, it can be reused.